


## SERIES 9000 Attrition Cells Spec Sheet

**● ATTRITION CELL**

- Heavy duty rubber lined tank designed to minimize vortexing, back-mixing, short circuiting and dead zones. Round tank with baffles on the Model #AC 900-1 and hexagonal tank(s) on the Model #AC 2100-2 and #AC 4200-4
- Access ports with bolt-on covers
- High speed, rubber lined, oppositely pitched turbines. Twin impellar blades on the Model #AC 900-1 and triple blades on the Model #AC 2100-2 and #AC 4200-4. Custom turbine designs available – consult factory
- \_\_\_ HP, TEFC, 3/60/230-460 heavy duty drive assembly with Faulk direct coupled right angle gear reducer

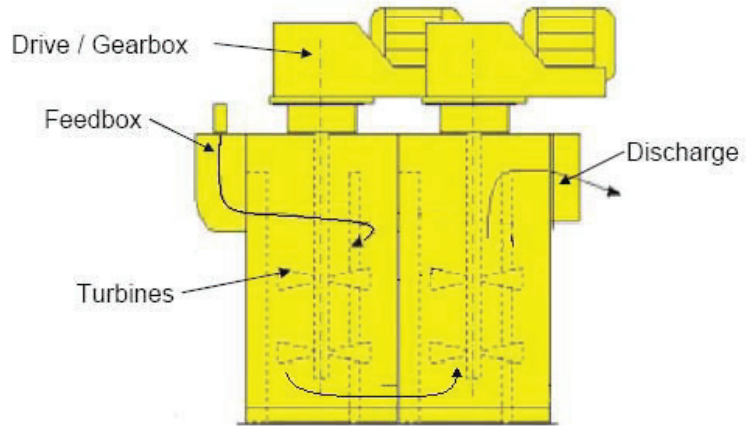

### POWER REQUIREMENTS & APPROX CAPACITIES

| Model     | HP      | Volume     | No. of Cells | Shape of Cells     | Approx. Capacity |
|-----------|---------|------------|--------------|--------------------|------------------|
| AC 900-1  | 50      | 900 gals.  | 1            | Round with baffles | 133 stph         |
| AC 2100-2 | 2 @ 100 | 2100 gals. | 2            | Hexagonal          | 310 stph         |
| AC 4200-4 | 4 @ 100 | 4200 gals. | 4            | Hexagonal          | 620 stph         |

**FOR MORE INFORMATION CALL 1-800-542-9311 AND ASK FOR A KOLBERG EQUIPMENT SPECIALIST**

**NOTE:** Specifications are subject to change without notice.

Because KPI-JCI may use in its catalog & literature, field photographs of its products which may have been modified by the owners, products furnished by KPI-JCI may not necessarily be as illustrated therein. Also continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of KPI-JCI are subject to the provisions of its standard warranty. KPI-JCI does not warrant or represent that its products meet any federal, state, or local statutes, codes, ordinances, rules, standards or other regulations, including OSHA and MSHA, covering safety, pollution, electrical wiring, etc. Compliance with these statutes and regulations is the responsibility of the user and will be dependent upon the area and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and other safety equipment is often dependent upon the area and how the product is used. A safety study should be made by the user of the application, and, if required additional guards, warning signs and other safety devices should be installed by the user, wherever appropriate before operating the products.