




TRACK MOUNTED HORIZONTAL SHAFT IMPACTOR Model FT5260 Spec Sheet

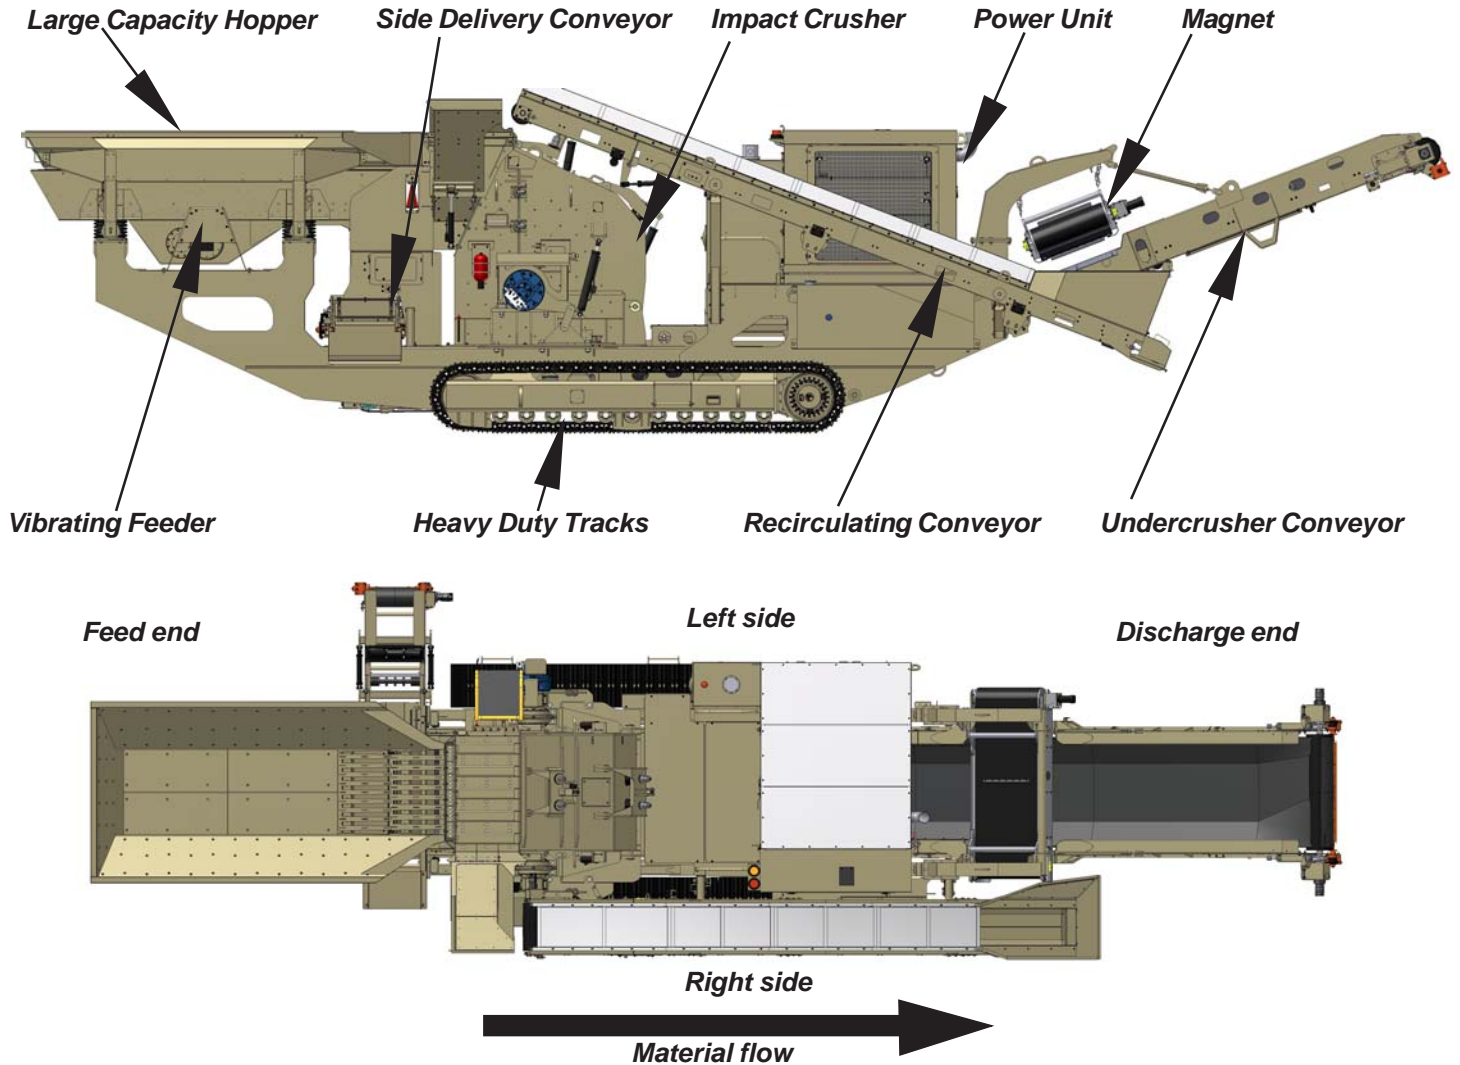

- **VIBRATING GRIZZLY FEEDER**

- 50" X 15' Vibrating Pan Feeder
- 5' Grizzly fingers 2" spacing

- **HSICRUSHER**

- 5260 Horizontal Impactor
- Hydraulically adjustable aprons
- Hydrostatic dual drive motors
- 3 Bar rotor

- **CHASSIS**

- Sculpted frame design with manufactured tubing
- 24" 600mm tracks with dual drive
- Track width 11'7-3/4"/3.549m
- Balanced for zero cribbing
- Dust suppression
- 200 gal/757 L Oil Reservoir

- **UNDERCRUSHER CONVEYOR**


- 60" x 40' Under crusher conveyor
- Impact bed with 330 3ply belting
- Hydraulic dual drive motors

- **POWER UNIT**

- Cat C15 540hp/402.6kw Tier IV i
- Cat C15 540hp/402.6kw Tier III (International)
- 224gal/847.9L fuel tank
- Fuel Consumption 15-18 gal

- **OPTIONS**

- 24" x 11' Side delivery conveyor
- Permanent cross belt magnet
- 440piw single ply belting
- 50" x 18' Vibrating Feeder
- 24" x 28' Recirculating conveyor
- 4 Bar rotor
- Electrical/Hydraulic Control Valve (CE Certification)

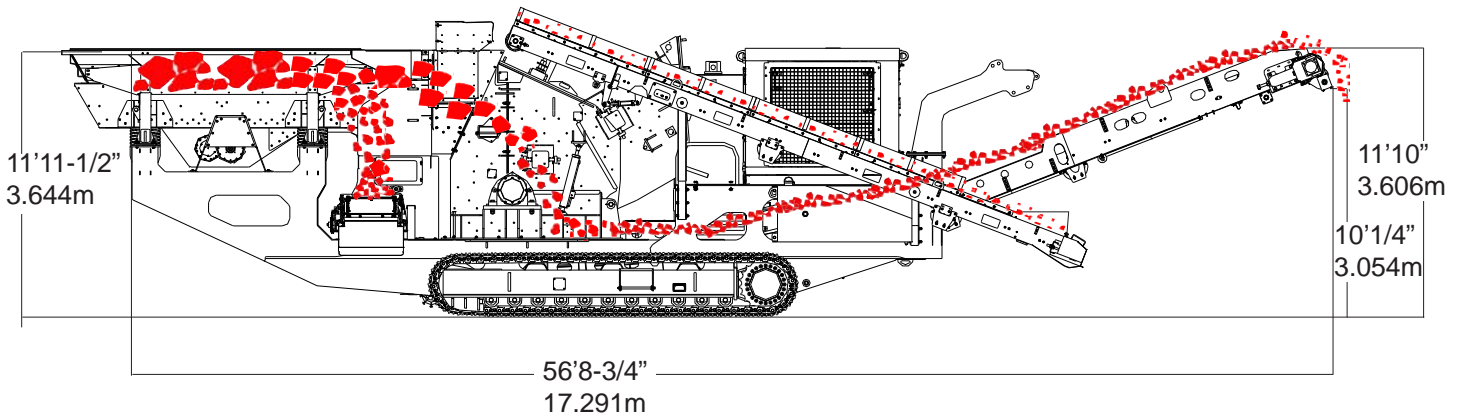

● **CRUSHER**

Max Feed Size..... 21\"/>

● **PHYSICAL/OPERATING CHARACTERISTICS**


Overall Length.....	56' 8-3/4\"/>
Operating Height.....	14' 2\"/>
Travel Height.....	12' 3.658m
Ground Clearance.....	10 -1/2\"/>
Travel Width.....	12' 3.658m
Feed Height.....	14' 2\"/>
Discharge Height.....	11' 3.353m
Unit Weight.....	118,600 lbs/53796kg

● **OPERATING SLOPE**

Side to Side.....	1% grade	Front to Back.....	3% grade
-------------------	----------	--------------------	----------

● **PERFORMANCE WHEN MOVING**

Travel Speed.....	60MPH	Gradability.....	50%
Total Tractice Effort.....	70,519 lbf	Ground Pressure.....	2415PSF

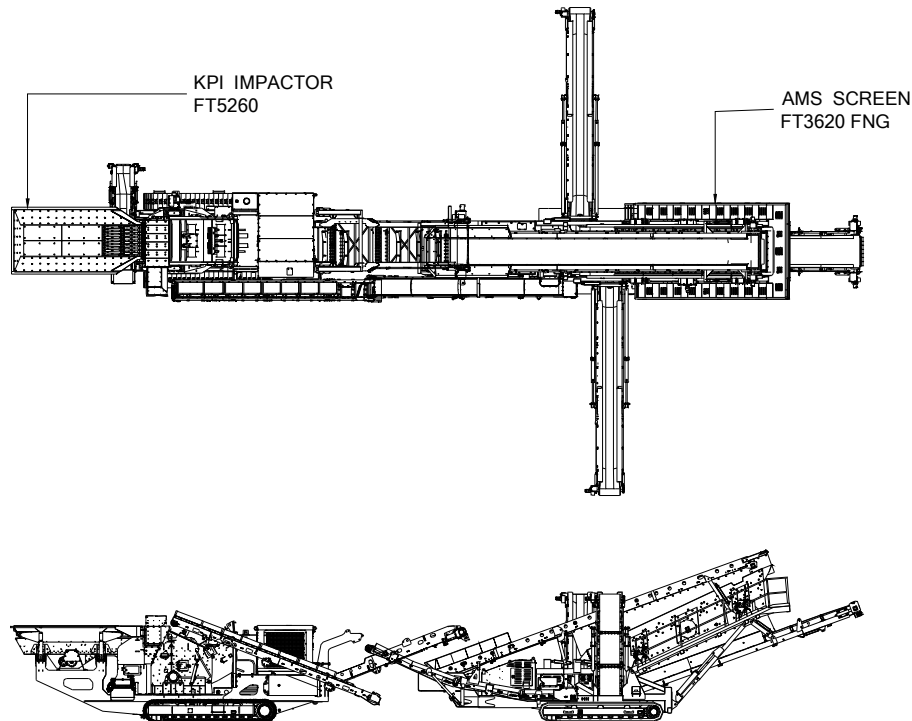

NOTE: Specifications are subject to change without notice.

Because KPI-JCI may use in its catalog & literature, field photographs of its products which may have been modified by the owners, products furnished by KPI-JCI may not necessarily be as illustrated therein. Also continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of KPI-JCI are subject to the provisions of its standard warranty. KPI-JCI does not warrant or represent that its products meet any federal, state, or local statutes, codes, ordinances, rules, standards or other regulations, including OSHA and MSHA, covering safety, pollution, electrical wiring, etc. Compliance with these statutes and regulations is the responsibility of the user and will be dependent upon the area and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and other safety equipment is often dependent upon the area and how the product is used. A safety study should be made by the user of the application, and, if required additional guards, warning signs and other safety devices should be installed by the user, wherever appropriate before operating the products.