





TRACK MOUNTED SCREENING PLANT Model FT6203 Spec Sheet

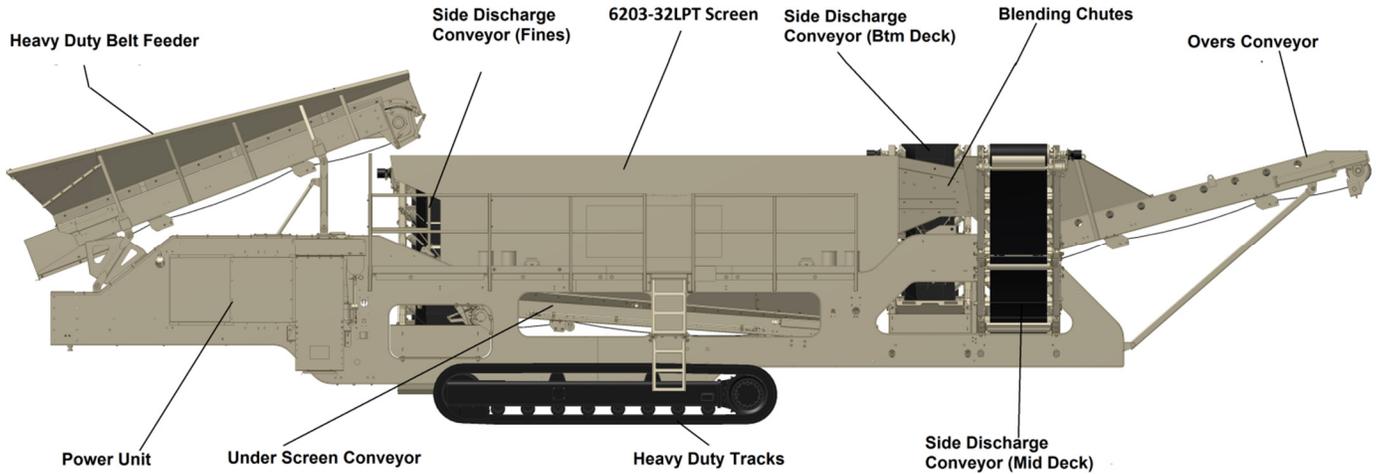

- **HEAVY DUTY BELT FEEDER**
 - Large capacity hopper
 - 48" variable speed
 - Full length impact bed
 - Heavy duty grade 1 belting
- **6203-32LPT SCREEN**
 - 6' x 20' triple deck
 - Aggressive stroke triple shaft horizontal
 - Fully adjustable to fit most applications
- **UNDER SCREEN CONVEYOR**
 - 72" x 18' Under screen conveyor
 - Grade II, 330 3 ply belting
- **SIDE DISCHARGE CONVEYORS**
 - 36" x 28' SD (Fines)
 - 30" x 28' SD (Middle deck)
 - 30" x 28' SD (Bottom deck)
 - Grade II, 330 3 ply belting
 - 10' discharge height
- **OVERS CONVEYOR**
 - 42" x 15' Top Deck
 - Grade II, 330 3 ply belting
- **CHASSIS**
 - I-Beam frame design balanced for zero cribbing
 - Tracks with 500mm grousers
 - Components fold hydraulically for transport
 - Grease lines for easy maintenance
 - Walkways on both side of the plant
- **BLENDING CHUTES**
 - Middle deck blending capability
 - Flop gates to blend in 25% increments
- **POWER UNIT**
 - OPTIONS
 - o Cummins QSB 6.7/190HP Tier III
 - o CAT C6.6 225HP Tier III
 - o CAT C7.1 225HP Tier IV
 - Two 20gpm auxiliary hydraulic circuits
 - 187gal/568L fuel tank
- **CONTROLS**
 - Adjustable screen speed control w/screen under/over speed protection
 - Diagnostics with data storage
 - 24 volt controls
- **OPTIONS**
 - Engine air intake filtration system (Patented)
 - Dust suppression
 - Wireless remote (track drive/feeder)
 - Grizzly dump feeder (hydraulic)
 - Front stabilizers under feeder
 - Transport dolly
 - Optional conveyor lengths

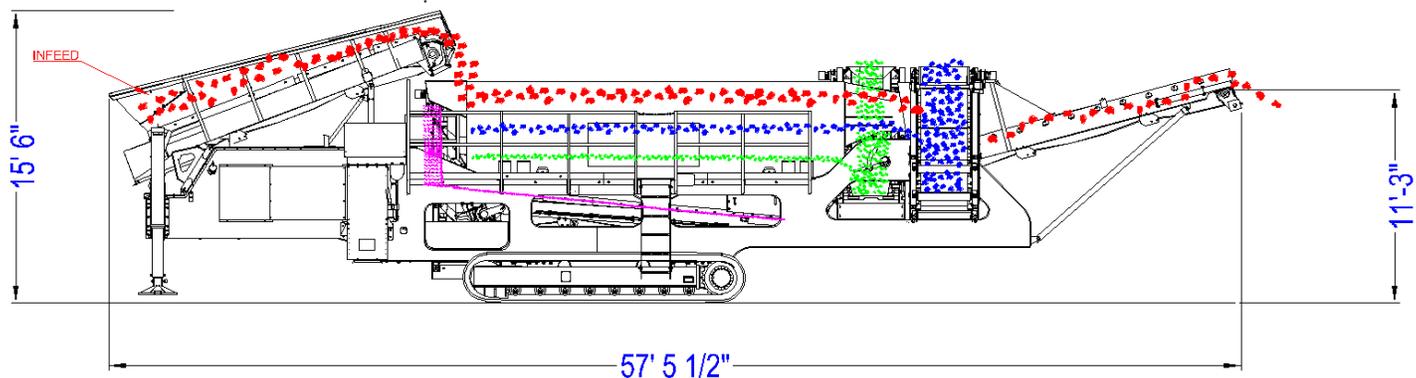


• **SCREEN**

Max Feed Size Up to 10"/254mm rock Plant CapacityUp to 800 STPH/726 MTPH
 Max Top Deck Opening..... 4"/102mm
 Max Drop of Feed 18"/458mm

• **PHYSICAL/OPERATING CHARACTERISTICS**

Operating Length57' 5.5" /17.5m	Travel Width.....11' 7.5" /3.54m
Operating Height.....15' 6" /4.72m	Feed Height (Removable Panel).....9' 5"/2.9m
Travel Height on dolly13' 6" /4.11m	Feed Height.....11' 2.5" /3.42m
Travel Height lowboy (18").....14' 6" /4.42m	Discharge Height.....11'3" /3.43m
Ground Clearance.....12.25" /.311m	Unit Weight.....83,000lbs/37,648kg

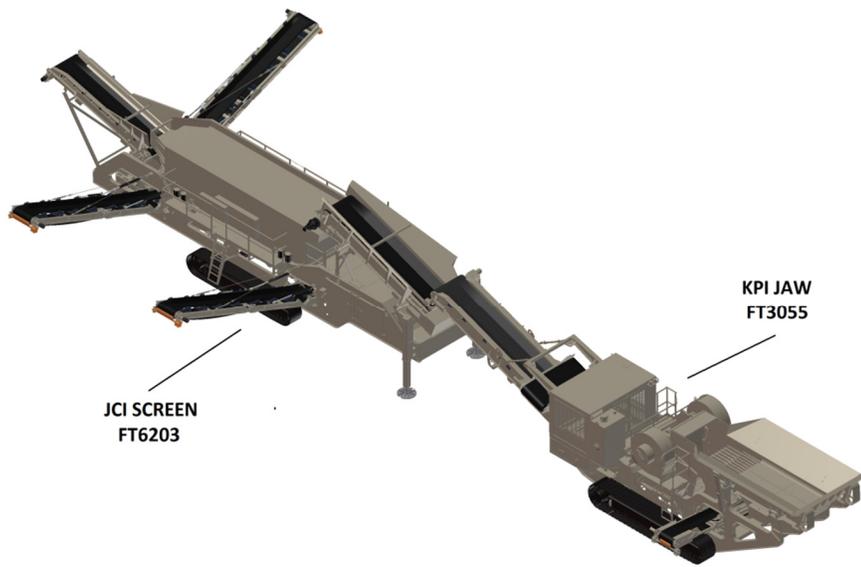

Note: Specifications are subject to change without notice.

Because KPI-JCI may use in its catalog & literature, field photographs of its products which may have been modified by the owners, products furnished by KPI-JCI may not necessarily be as illustrated therein. Also continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of KPI-JCI are subject to the provisions of its standard warranty. KPI-JCI does not warrant or represent that its products meet any federal, state, or local statutes, codes, ordinances, rules, standards or other regulations, including OSHA and MSHA, covering safety, pollution, electrical wiring, etc. Compliance with these statutes and regulations is the responsibility of the user and will be dependent upon the area and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and other safety equipment is often dependent upon the area and how the product is used. A safety study should be made by the user of the application, and, if required additional guards, warning signs and other safety devices should be installed by the user, wherever appropriate before operating the products



86470 Franklin Blvd, Eugene, OR 97405
 1-800-314-4656 Fax: 541-988-9401

Email: mail@icieug.com
www.kpijci.com

JCI FT6203 9/28 Rev1