


# Series 9000 Dewatering Cyclones Spec Sheet

● **MODEL #DWC 6/6, #DWC 6/10, #DWC 10/10 & #DWC 16/10**

- Heavy duty fibre reinforced plastic (FRP) casing
- Concave, convex 360° spiral inlet head liner
- Inlet pressure diaphragm and gauge
- Snap fit, replaceable elastomer (i.e. – rubber) liners
- Stainless steel quick release clamp fasteners
- Replaceable urethane vortex finder
- Replaceable rubber apex/spigot
- Flexible rubber “fishtail” dewatering discharge boot and siphon control valve
- Extended steel overflow pipe

● **MODEL #DWC 20/10, #DWC 26/13 & #DWC 32/13**

- Heavy duty fabricated steel or cast ductile iron casing
- Concave, convex 360° spiral inlet head liner
- Inlet pressure diaphragm and gauge
- Replaceable elastomer (i.e. – rubber) liners
- Bolt together cone sections
- Replaceable rubber lined vortex finder
- Replaceable rubber apex/spigot
- Flexible rubber “fishtail” dewatering discharge boot and siphon control valve
- Extended steel overflow pipe

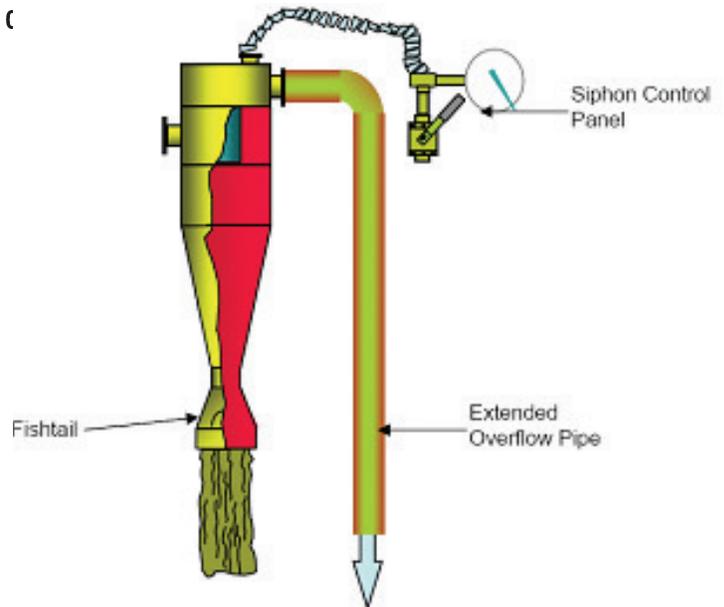

APPROX. CYCLONE CAPACITIES

Model	Typical Flow (gpm)
DWC 6/6	70 – 115
DWC 6/10	70 – 115
DWC 10/10	145 – 315
DWC 16/10	285 – 630
DWC 20/10	700 – 1300
DWC 26/13	1550 – 2850
DWC 32/13	2600 – 5200

Flow capacities provided are estimates only and are dependent on desired split point, feed percent solids, etc..  
Consult factory for specific applications

**FOR MORE INFORMATION CALL 1-800-542-9311 AND ASK FOR A KOLBERG EQUIPMENT SPECIALIST**

**NOTE:** Specifications are subject to change without notice.

Because KPI-JCI may use in its catalog & literature, field photographs of its products which may have been modified by the owners, products furnished by KPI-JCI may not necessarily be as illustrated therein. Also continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of KPI-JCI are subject to the provisions of its standard warranty. KPI-JCI does not warrant or represent that its products meet any federal, state, or local statutes, codes, ordinances, rules, standards or other regulations, including OSHA and MSHA, covering safety, pollution, electrical wiring, etc. Compliance with these statutes and regulations is the responsibility of the user and will be dependent upon the area and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and other safety equipment is often dependent upon the area and how the product is used. A safety study should be made by the user of the application, and, if required additional guards, warning signs and other safety devices should be installed by the user, wherever appropriate before operating the products.