

# TXR5624 PORTABLE RIP RAP PLANT




## STANDARD FEATURES

- ▶ 56" x 24' (1422 x 7315 mm) Simplicity vibrating grizzly feeder
  - Two 5' (1524 mm) sections of adjustable grizzly bars
- ▶ Heavy-duty 1" (25.4 mm) plate feed hopper
  - Reinforcing ribs and vertical support beams
- ▶ Main drive includes Tier 4i-compliant Cummins electronic generator, fuel tank and battery box with wiring
- ▶ Complete electrical panel with operator control box, e-stops and additional ports for outboard conveyors
- ▶ 1/2" (12.7 mm) plate primary grizzly material discharge chute to product conveyor
- ▶ 3/4" (19 mm) plate secondary grizzly material discharge chute lined with Hardox liners
- ▶ 1/2" (12.7 mm) plate oversized material discharge chute lined with Hardox liners
- ▶ 30" (762 mm) cross conveyor with 4-ply belting
  - 5" (127 mm) diameter, Cema B troughing idlers
  - Impact bed with sliders
- ▶ Rugged I-beam portable chassis
  - Triple axle suspension with air brakes
  - Twelve tires
  - Landing jacks, jack screws and eight cribbing supports
  - Mud flaps and tail lights
  - Fold-up kingpin for run position
- ▶ Heavy-duty fender on feed side to prevent material buildup

# SPECIFICATIONS

## Terex® Minerals Processing Systems Simplicity® TXR5624 Portable Rip Rap Plant

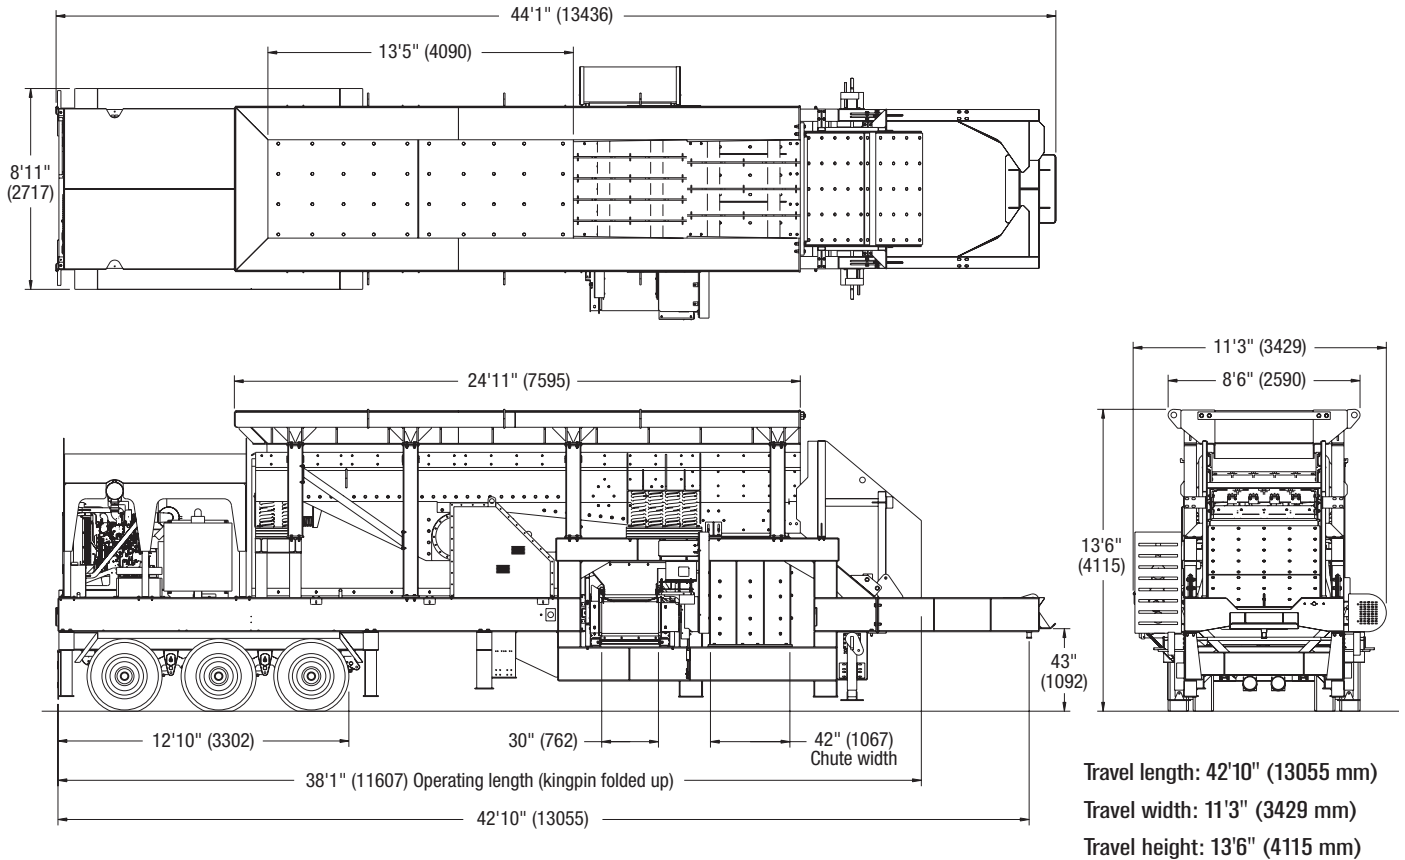

### SPECIFICATIONS

Simplicity vibrating grizzly feeder.....	56" x 24' (1422 x 7315 mm)
Cross conveyor .....	30" (762 mm)
<b>Horsepower</b>	
Simplicity vibrating grizzly feeder.....	60 hp (45 kW)
Cross conveyor .....	10 hp (7.5 kW)

### Approximate Weights

Kingpin.....	27,500 lbs (12475 kg)
Rear axle.....	49,500 lbs (22450 kg)
Total .....	77,000 lbs (34925 kg)

[www.terexmps.com](http://www.terexmps.com)

Effective Date: March 2014. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. All rights are reserved. Terex, the Terex Crown design, and Simplicity are trademarks of Terex Corporation or its subsidiaries. All other trademarks are property of their respective owners. © 2014 Terex Minerals Processing Systems.

Terex® Minerals Processing Systems, 212 South Oak Street, Durand, MI 48429 USA  
Tel +1 989 288 3121 Toll Free +1 888 571 8352 Fax +1 989 288 4113 [www.terexmps.com](http://www.terexmps.com)

Form 25516 (3/14)



**WORKS FOR YOU.™**