

	<u>47-3050S</u>	<u>47-3060S</u>	<u>47-3070S</u>	<u>47-3650S</u>	<u>47-3660S</u>	<u>47-3670S</u>	<u>47-4250S</u>	<u>47-4260S</u>
Drive (HP)	15	15	20	20	20	25	20	20
Length in feet (A)	50	60	70	50	60	70	50	60
Weight (lbs)	8,300	9,000	10,400	8,600	9,650	11,150	8,800	10,000

Conveyor Frame:

Lattice Frame with heavy duty chord and intermediate angles.

Idlers:

- All standard idlers are CEMA B – 5” diameter
- 35 degree troughing idlers (3 roll) on 4’ spacing
 - 20 degree idlers (3 roll) at feed point close spacing
 - Flat steel return idlers (single roll) on 10’ spacing

Receiving Trough:

5’ 6” long with adjustable rubber flashing.

Belt Drive:

- Head end drive
- Class I, Dodge shaft mount reducer w/backstop
- V-belt, motor mounts and guards
- grooved rubber lagged head
- steel wing tail
- 12” Screw take-up

Belt:

2 ply 220 PIW, 1/8” x 1/16” cover with mechanical fasteners

Belt Cleaner (Optional):


Martin belt cleaner on head pulley of conveyor

Paint:

One coat of primer, finish coat of Beige acrylic

Three Pack (Optional):

Three packs are groups of three Series 47 Stackable Conveyors that can be “piggy backed” on top of one another to facilitate easy transport from site to site. One conveyor of the three includes road portable options. The remaining two conveyors are transported on top of the road portable conveyor and include options for in-pit portability only.

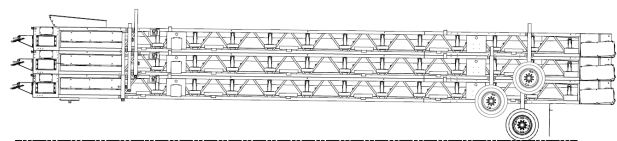


Roll Pack Option (Optional):

The Roll Pack is an upgrade to the Three Pack option. The conveyors are outfitted with a roller rail system that makes the unloading and set-up process happen quickly and easily.



Collapsible Undercarriage (Optional):

The collapsible undercarriage option equips a standard stackable conveyor with an undercarriage that does not need to be removed when transporting multiple conveyors on the same trailer. When in operating mode, this undercarriage allows the conveyor to be utilized as either a stacker or transfer conveyor.

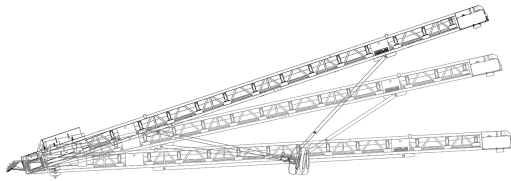

Options:

- Receiving Hopper
- AR Liners
- Roll Pack Upgrade
- Collapsible Undercarriage
- 3 ply; 330 PIW Belt Upgrade
- CEMA C Idler Upgrade
- Pintle Hitch
- Vulcanized Belt Splice
- Adjustable Height Dolly Undercarriage
- Landing Gear
- Walking Beam Axle Assembly
- Anchor Pivot for Radial Travel
- King Pin
- Air Brakes
- Travel Lights
- Dual Tires



700 W. 21st Street – P.O. Box 20
Yankton, South Dakota 57078
Phone: (605) 665-8771
FAX: (605) 665-8858
mail@kpijci.com
www.kpijci.com

NOTE: Specifications are subject to change without notice.

Because KPI-JCI may use in its catalog & literature, field photographs of its products which may have been modified by the owners, products furnished by KPI-JCI may not necessarily be as illustrated therein. Also continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of KPI-JCI are subject to the provisions of its standard warranty. KPI-JCI does not warrant or represent that its product meet and federal, state, or local statutes, codes, ordinances, rules, standards or other regulations, including OSHA and MSHA, covering safety, pollution, electrical wiring, etc. Compliance with these statutes and regulations is the responsibility of the user and will be dependent upon the areas and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and other safety equipment is often dependent upon the area and the use to which the product is put. A safety study should be made by the user of the application, and, if required additional guards, warning signs and other safety devices should be installed by the user, wherever appropriate before operating the products.