





GT125 TRACK-MOUNTED CRUSHING PLANT

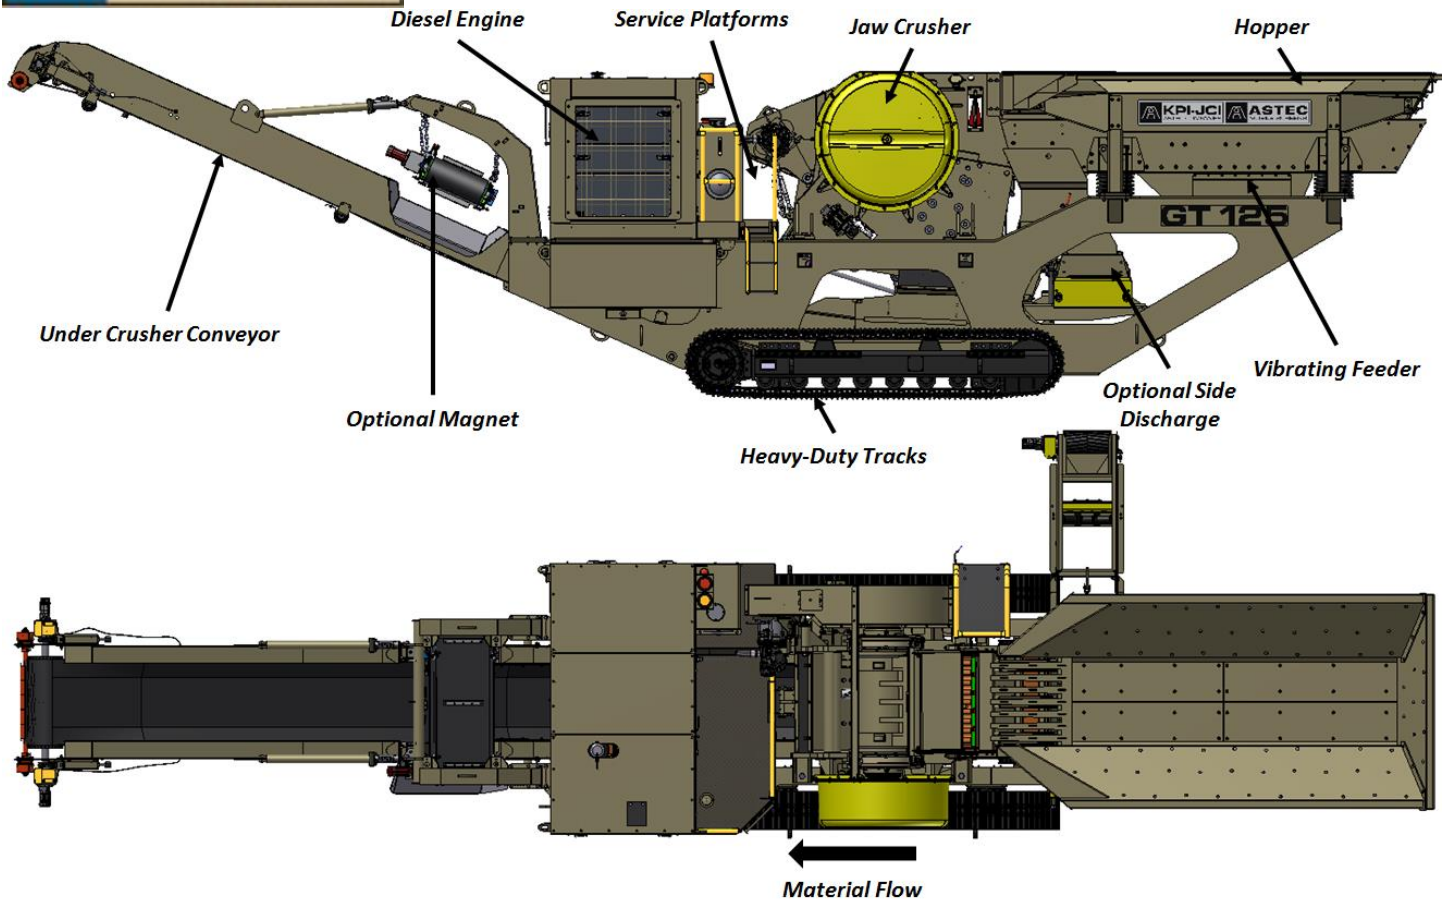


- **VIBRATING GRIZZLY FEEDER**
 - 40" (1016mm) x 14' (4.3m) Vibrating Pan Feeder
 - 5.5 cubic yard hopper
 - 30" grizzly fingers 2 ½" nominal spacing
 - Bypass chute with flop gate
 - **JAW CRUSHER - VANGUARD**
 - Jaw opening- 27" (686 mm) Jaw width- 42" (1067 mm)
 - 1 ¼" stroke
 - Three (3) piece AR steel side liners
 - Manganese steel jaw dies, cast steel pitman
 - Heavy-duty flywheels
 - **UNDER CRUSHER CONVEYOR**
 - 36" (900mm) fixed height with full spill boards
 - Impact bed, 360PIW, endless belting
 - Easily removed for maintenance
 - **CHASSIS**
 - Sculpted frame design
 - 15.7" (400mm) tracks with dual drive
 - Track length 10' 8" (3.2m)
 - **POWER UNIT**
 - CAT C7.1 225hp / 166kw Tier 4 Final
 - 140gal (530L) fuel tank
 - 70gal (265L) oil reservoir
-
- **OPTIONS**
 - 18" (450mm) side delivery conveyor, hydraulic travel fold
 - Permanent cross belt magnet
 - CAT C7 Tier 3 vs. Tier 4 (International only)
 - Tramp Iron Relief (TIR) on jaw
 - Dust suppression

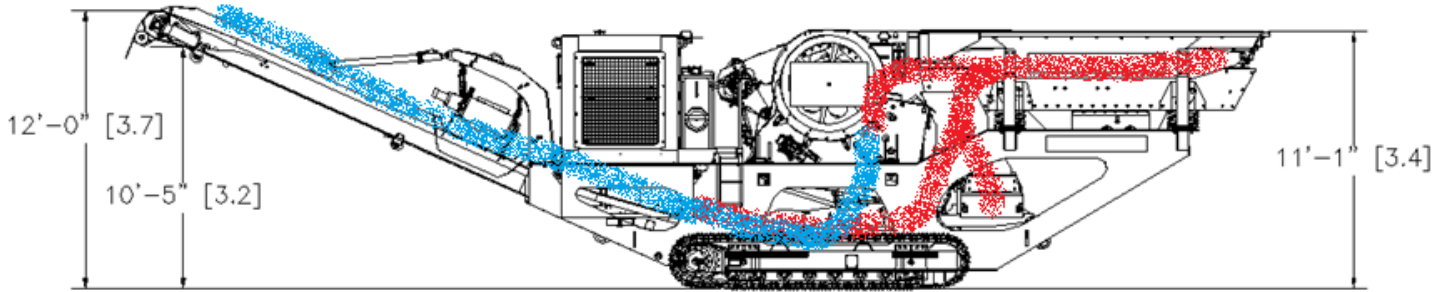

GT125 JAW PLANT

• PHYSICAL/OPERATING CHARACTERISTICS

Operating Length.....	49' 0" / 14.9m	Operating Width.....	9' 4" / 2.8m
Travel Length.....	49' 10" / 15.2m	Travel Width.....	9' 4" / 2.8m
Operating Height.....	12' 2" / 3.7m	Feed Height.....	11' 2" / 3.4m
Travel Height.....	11' 2" / 3.4m	Discharge Height.....	11' 4" / 3.5m
Ground Clearance.....	10" / 0.3m	Side Discharge (optional).....	4' 5" / 1.4m
		Unit Weight (est.) w/o options.....	81,000 lb./ 36,741 kg

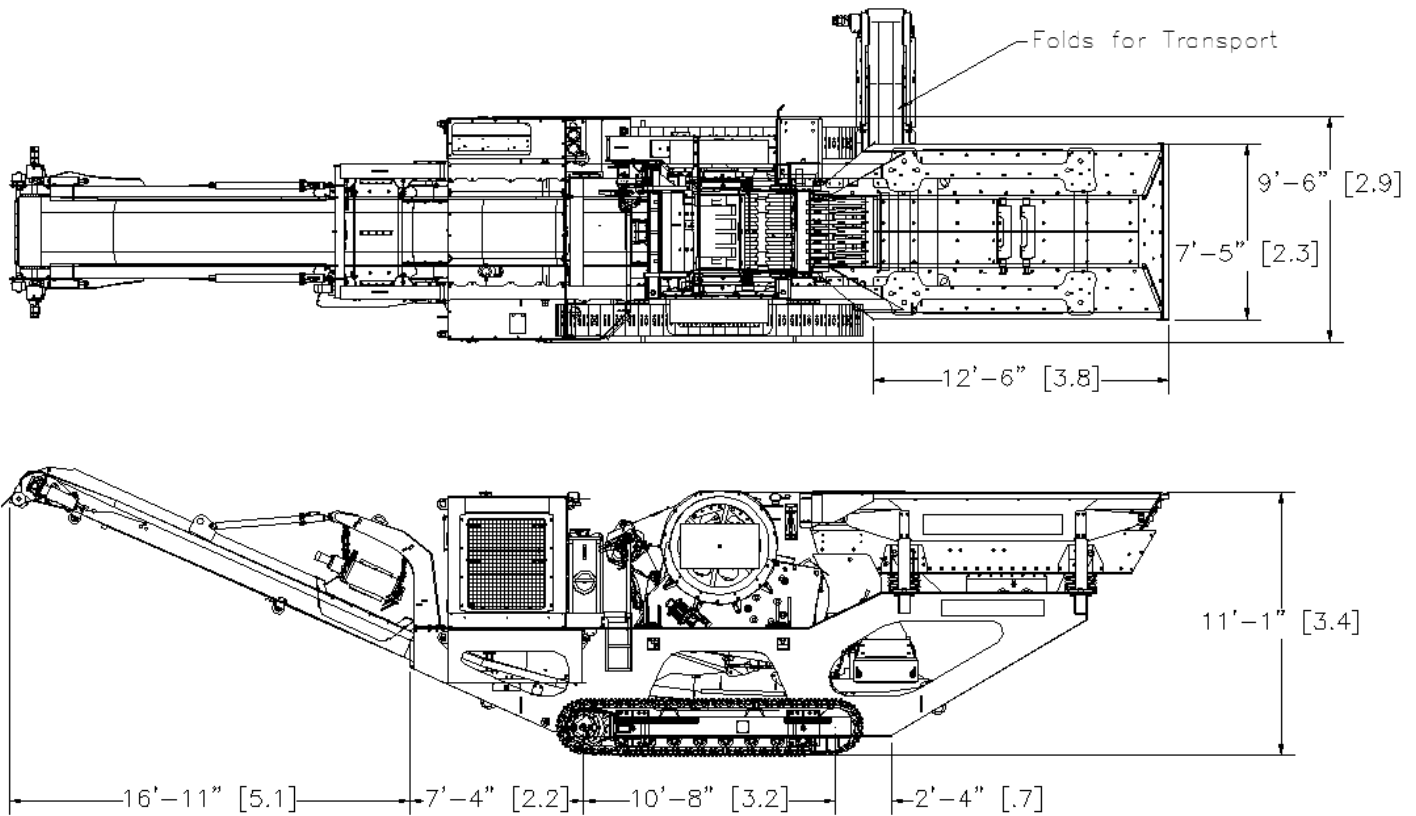

Note: Specifications are subject to change without notice.

Because KPI-JCI and Astec Mobile Screens may use in its catalog and literature, field photographs of its products which may have been modified by the owners, products furnished by KPI-JCI and Astec Mobile Screens may not necessarily be as illustrated therein. Also continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of KPI-JCI and Astec Mobile Screens are subject to the provisions of its standard warranty. KPI-JCI and Astec Mobile Screens does not warrant or represent that its products meet any federal, state, or local statutes, codes, ordinances, rules, standards or other regulations, including OSHA and MSHA, covering safety, pollution, electrical wiring, etc. Compliance with these statutes and regulations is the responsibility of the user and will be dependent upon the area and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and other safety equipment is often dependent upon the area and how the product is used. A safety study should be made by the user of the application, and, if required additional guards, warning signs and other safety devices should be installed by the user, wherever appropriate before operating the products.



700 W 21st. St., Yankton, SD 57078
1-800-542-9311 Fax: 605-665-8858

Email: mail@kpijci.com
www.kpijci.com

Ref # - 338624 KPI GT125 2/11/15 Rev 0